




Kyocera Opal S14 Motherboard Replacement

This guide will show you how to remove the motherboard from the front casing of the phone.

Written By: Erica

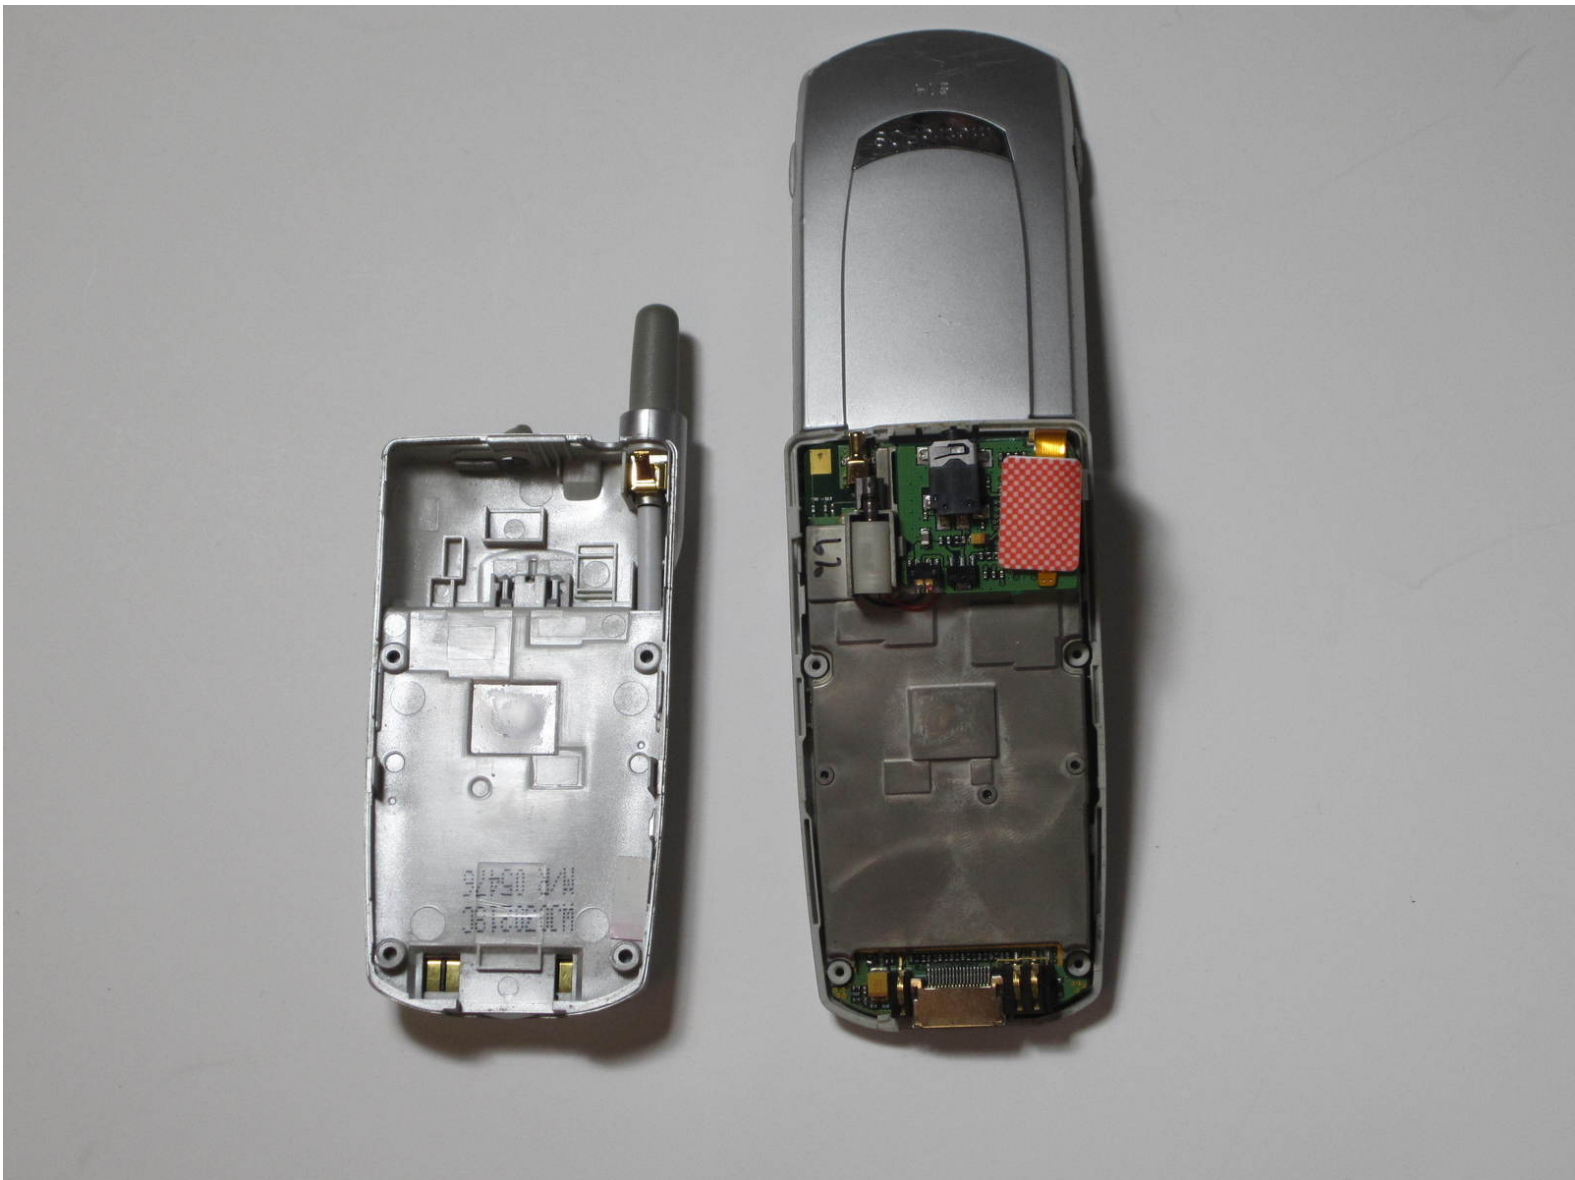




TOOLS:


- [iFixit Opening Tools](#) (1)
-

Step 1 — Rear Case

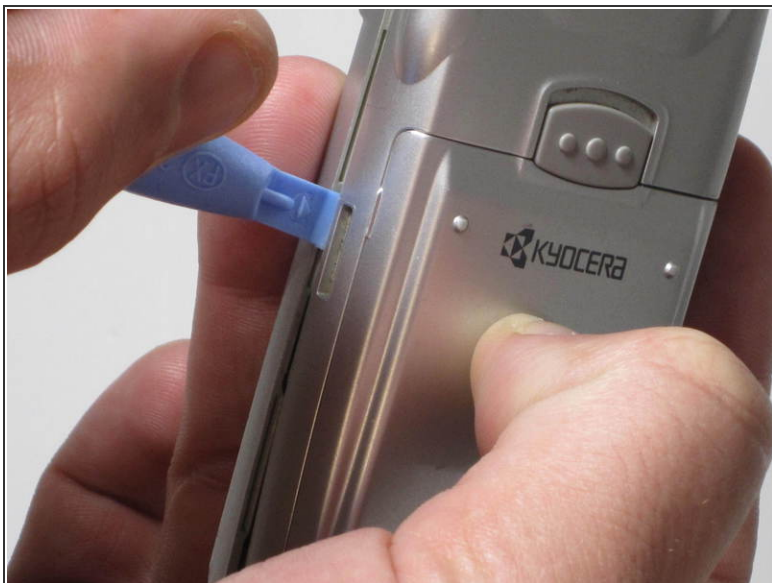


- Place prying device along the side crease of the phone.

Step 2

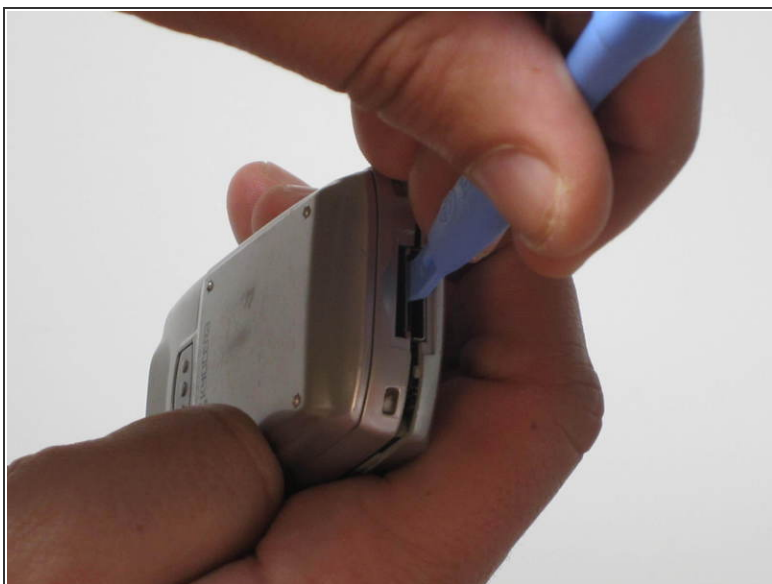



- Slide the prying device downward to disjoin the rear casing from the front casing. Continue around all edges.

Step 3

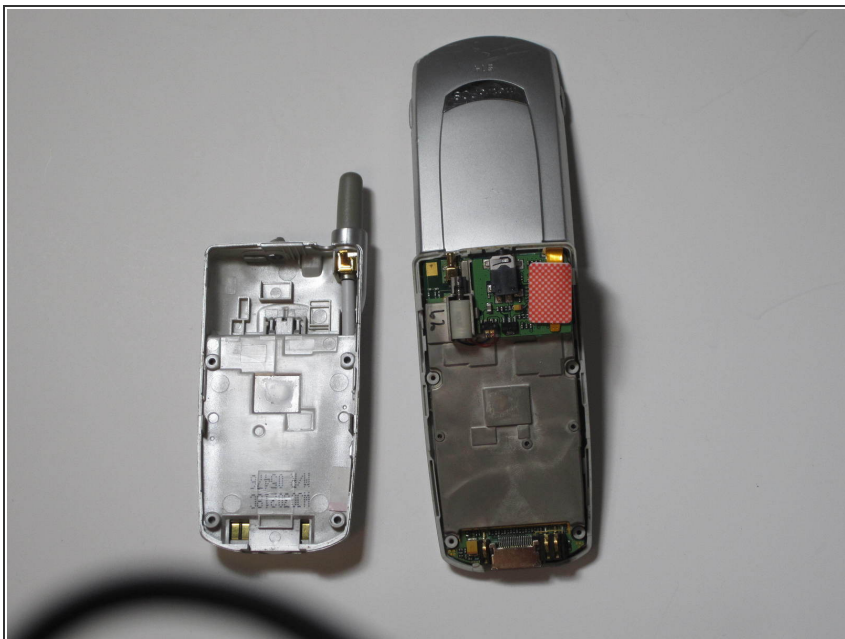

- Remove the back casing from the front casing. Force may be necessary.

Step 4

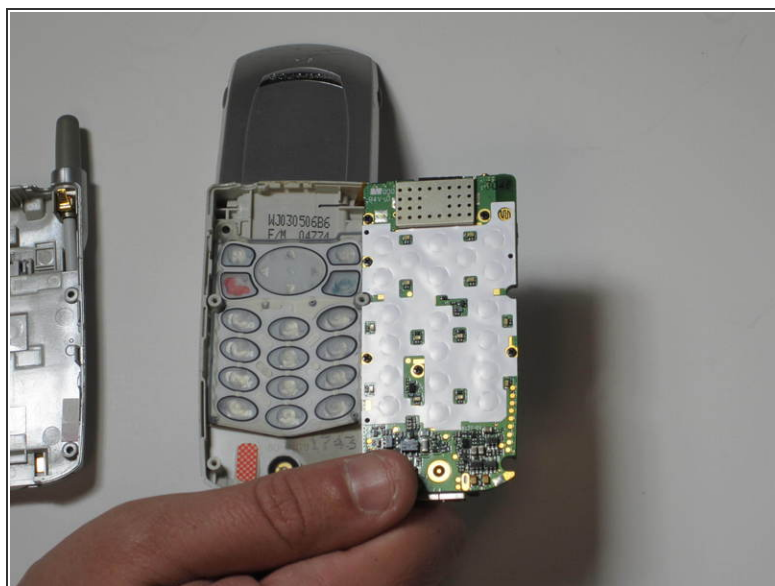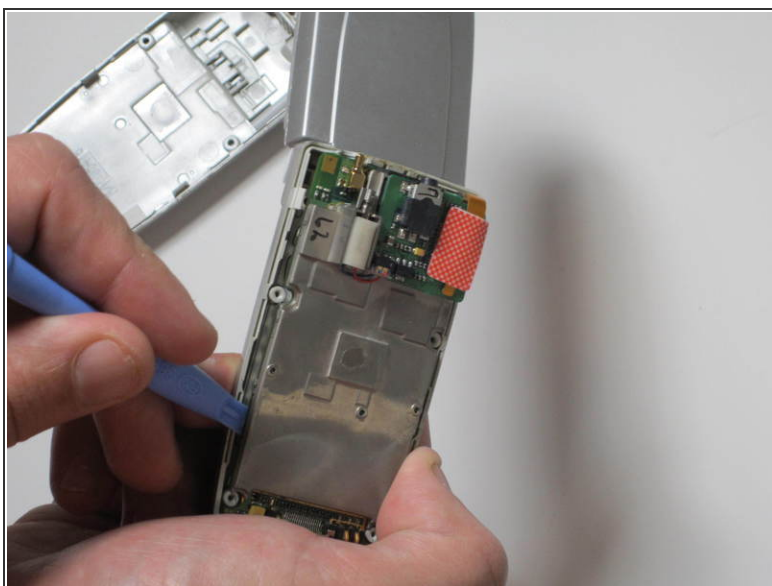

- Use prying device to remove motherboard from the back of the phone.

To reassemble your device, follow these instructions in reverse order.

